



FLAT DISPLAY TECHNOLOGY

10.2" Open Frame Monitor

Model Number: LOF102W~~xx~~



This product is RoHS compliant

SPEC No.: SAS-0805004

Version: 0.0

Issue Date: October 3, 2008



1. Introduction:

1.1 About the Product

The LOF102W~~xx~~ 10.2" Open Frame Monitor series are rugged, high performance Industrial LCD Monitors, designed for commercial and industrial applications, such as kiosks, arcade games, ATM Machines, aviation simulators, military, medical, marine, security, industrial equipment, and instrumentation equipment. This product can provide high brightness and contrast to achieve better viewing effect.

1.2 Features

- 10.2inch WVGA Active Matrix Color TFT LCD Monitor
- High Contrast 400:1 Typical
- Recommend resolution:800x480(WVGA)
- OSD controls: Allow on-screen adjustments of Brightness, Contrast, RGB Auto Color Balance, H-Position, V-position
- Multi system Video Input and auto detection video system.
- Signal loss backlight will be off / signal feed again backlight will be on
- Quick and easy integrations for Client solutions
- Universal AC Power input
- PMMA (Poly Methyl Methacrylate) protection (option)
- Touch screen (option)
- Sunlight readable (option)

2. Contents

Contents Index	Page
1. Introduction	1
1.1 About the product	1
1.2 Features	1
2. Contents	2
3. Specifications	3
4. Ordering Information	4
5. VGA Input Format	5
6. Mechanical Drawing	6-11
6.1 LOF102W03-000R	6
6.2 LOF102W5U-000R	7
6.3 LOF102W5R-000R	8
6.4 LOF102W03-010R	9
6.5 LOF102W5U-010R	10
6.6 LOF102W5R-010R	11
7. Packing List	12
8. Installing the Monitor	13
8.1 Power Cable Connection	13
8.2 VGA Signal Cable Connection	13
8.3 Video / S-Video Cable Connection	13
8.4 Switch On The Power	13
9. OSD Control	14-16
9.1 Menu Operation	14-15
9.2 Operations	16
10. Trouble Shooting	17

3. Specifications

Parameter	Specifications	Unit	Remark
Model Name	LOF102W xx		
Screen Size	10.2" (diagonal)	inch	
Display Format	800 x (R.G.B) x 480	dot	
Display Color	262,144 colors		
TFT-LCD Active Area	222.0 (W) x 133.2 (H)	mm	
Pixel Pitch	0.2775 (W) x 0.2775 (H)	mm	
Contrast Ratio	400:1(Typ.)		
Brightness	400(Typ.)	Cd/m ²	
Viewing Angle	65~65(H); 45~65(V)(Typ.)	deg	
Outline Dimension	260(W) x 191(H) x 32.2(D)	mm	
Input/Output Interface	Video and S-video / D-Sub 15 pin female for VGA / USB or RS-232 (DB9 Female) for Touch Screen Driver (Option)		
Power Source	100-240V _{AC} 50-60Hz, Universal / +12V _{DC} @ 3A		
Power Consumption	< 10W		
Touch Screen Controller	5 wire Resistive Driver USB/ RS232 (Option)		
Operating Temperature	-10~60	°C	
Storage Temperature	-20~70	°C	
Lamp Life Time	30000(Min.)	hr	

FLAT DISPLAY TECHNOLOGY

■ LOF102W~~xx~~ V0.0 

4. Ordering Information

Parameter	LOF102W03-000R	LOF102W5U-000R	LOF102W5R-000R	Unit
CVBS	1	1	1	
S-Video	1	1	1	
VGA	WVGA (800x480)	WVGA (800x480)	WVGA (800x480)	
Touch Panel Type	-	5W Resistive	5W Resistive	
Touch Screen Interface	-	USB	RS232	
PMMA	⊙	-	-	
Weight (Include Accessory)	2.23	2.43	2.43	Kg

Note: Weight $\pm 10\%$

Parameter	LOF102W03-010R	LOF102W5U-010R	LOF102W5R-010R	Unit
CVBS	-	-	-	
S-Video	-	-	-	
VGA	WVGA (800x480)	WVGA (800x480)	WVGA (800x480)	
Touch Panel Type	-	5W Resistive	5W Resistive	
Touch Screen Interface	-	USB	RS232	
PMMA	⊙	-	-	
Weight (Include Accessory)	2.13	2.33	2.33	Kg

Note: Weight $\pm 10\%$

FLAT DISPLAY TECHNOLOGY

■ LOF102Wxx V0.0 


5. VGA Input Format

	Mode	Family	Resolution	H-Freq. (KHz)		V-Freq. (KHz)	
1	Mode 1	PC	720x350	31.47	(+)	70.1	(-)
2	Mode 2	PC	720x400	31.47	(-)	70.1	(+)
3	Mode 3	PC	640x480	31.47	(-)	59.9	(-)
4	Mode 4	VESA	640x480	37.86	(-)	72.8	(-)
5	Mode 5	VESA	640x480	37.50	(-)	75.0	(-)
6	Mode 7	VESA	800x600	35.16	(+)	56.3	(+)
7	Mode 8	VESA	800x600	37.88	(+)	60.3	(+)
8	Mode 9	VESA	800x600	48.08	(+)	72.2	(+)
9	Mode 10	VESA	800x600	46.88	(+)	75.0	(+)
10	Mode 12	VESA	1024x768	48.36	(-)	60.0	(-)
11	Mode 13	VESA	1024x768	56.48	(-)	70.1	(-)
12	Mode 14	VESA	1024x768	60.02	(+)	75.0	(+)
13	Mode 16	VESA	1280x1024	63.98	(+)	60.0	(+)
14	Mode 17	VESA	1280x1024	79.98	(+)	75.0	(+)


FLAT DISPLAY TECHNOLOGY

6. Mechanical Drawing

6.1 LOF102W03-000R

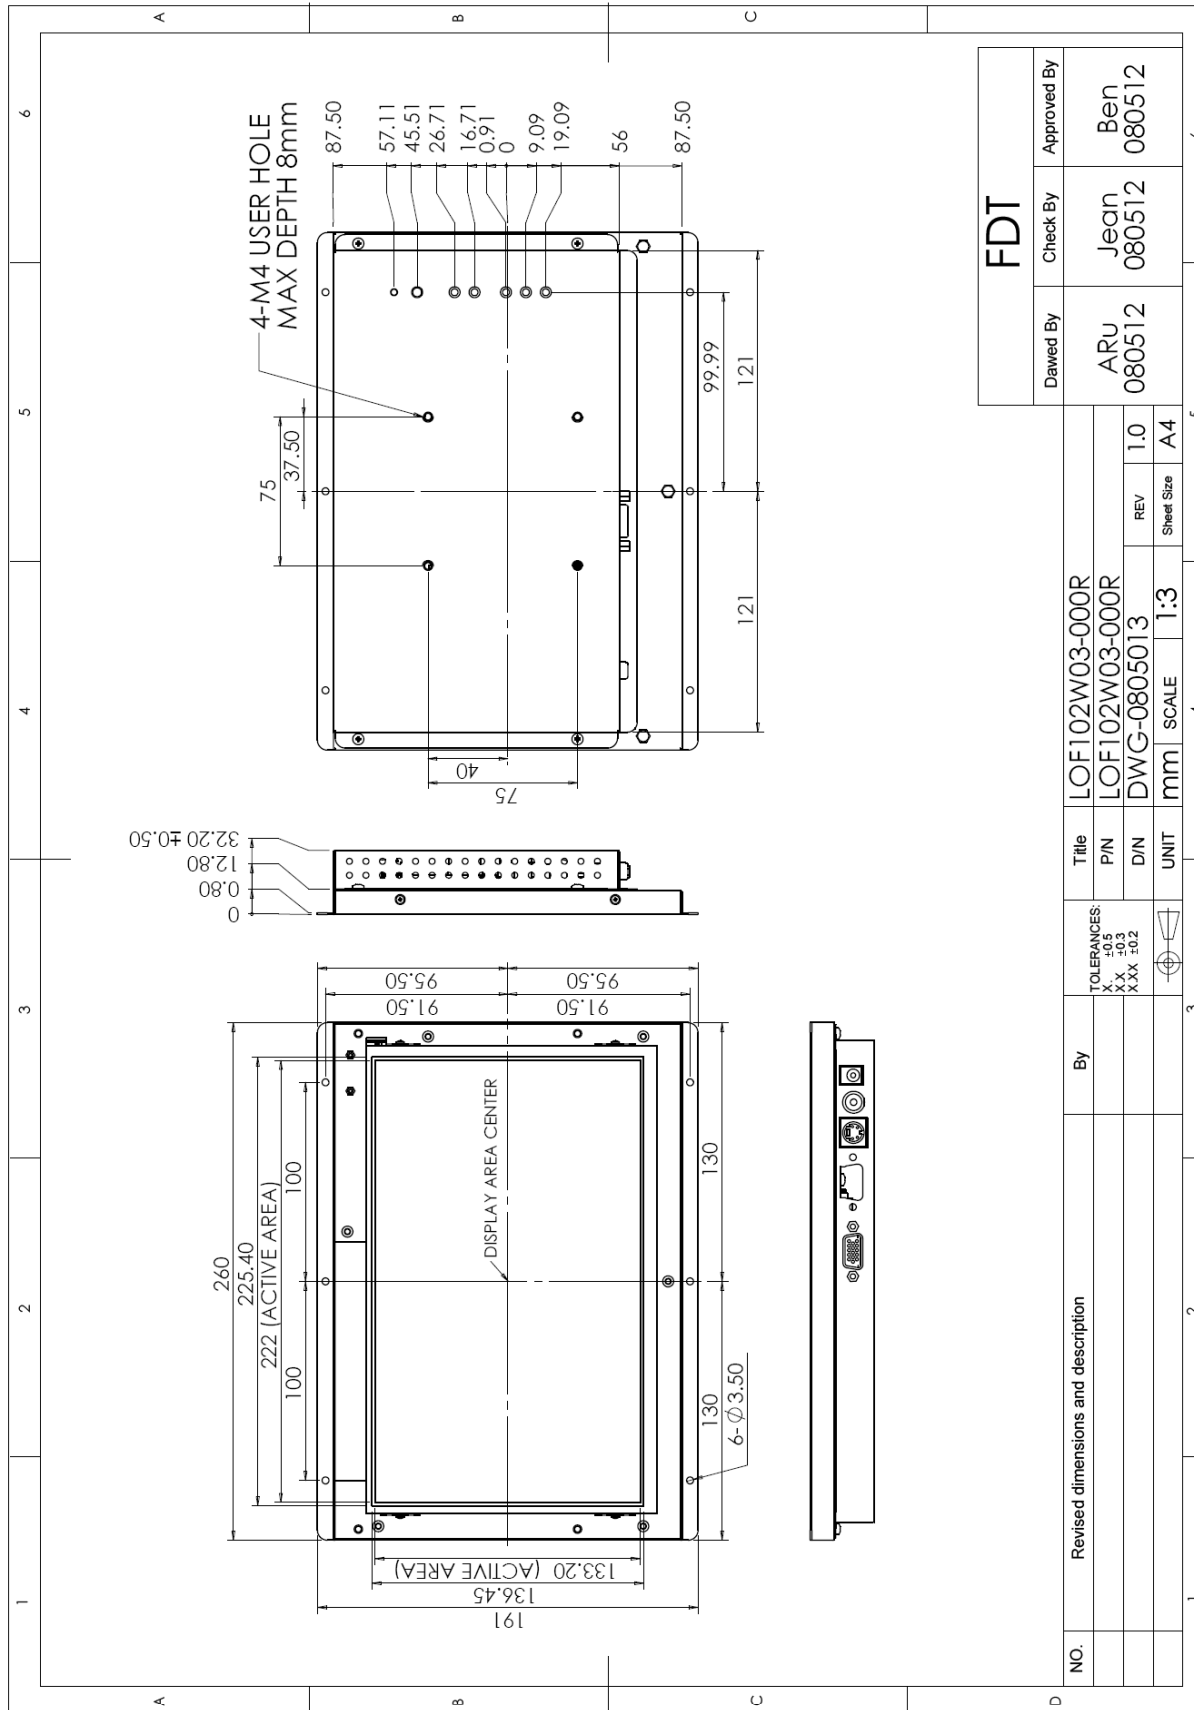


6.2 LOF102W5U-000R

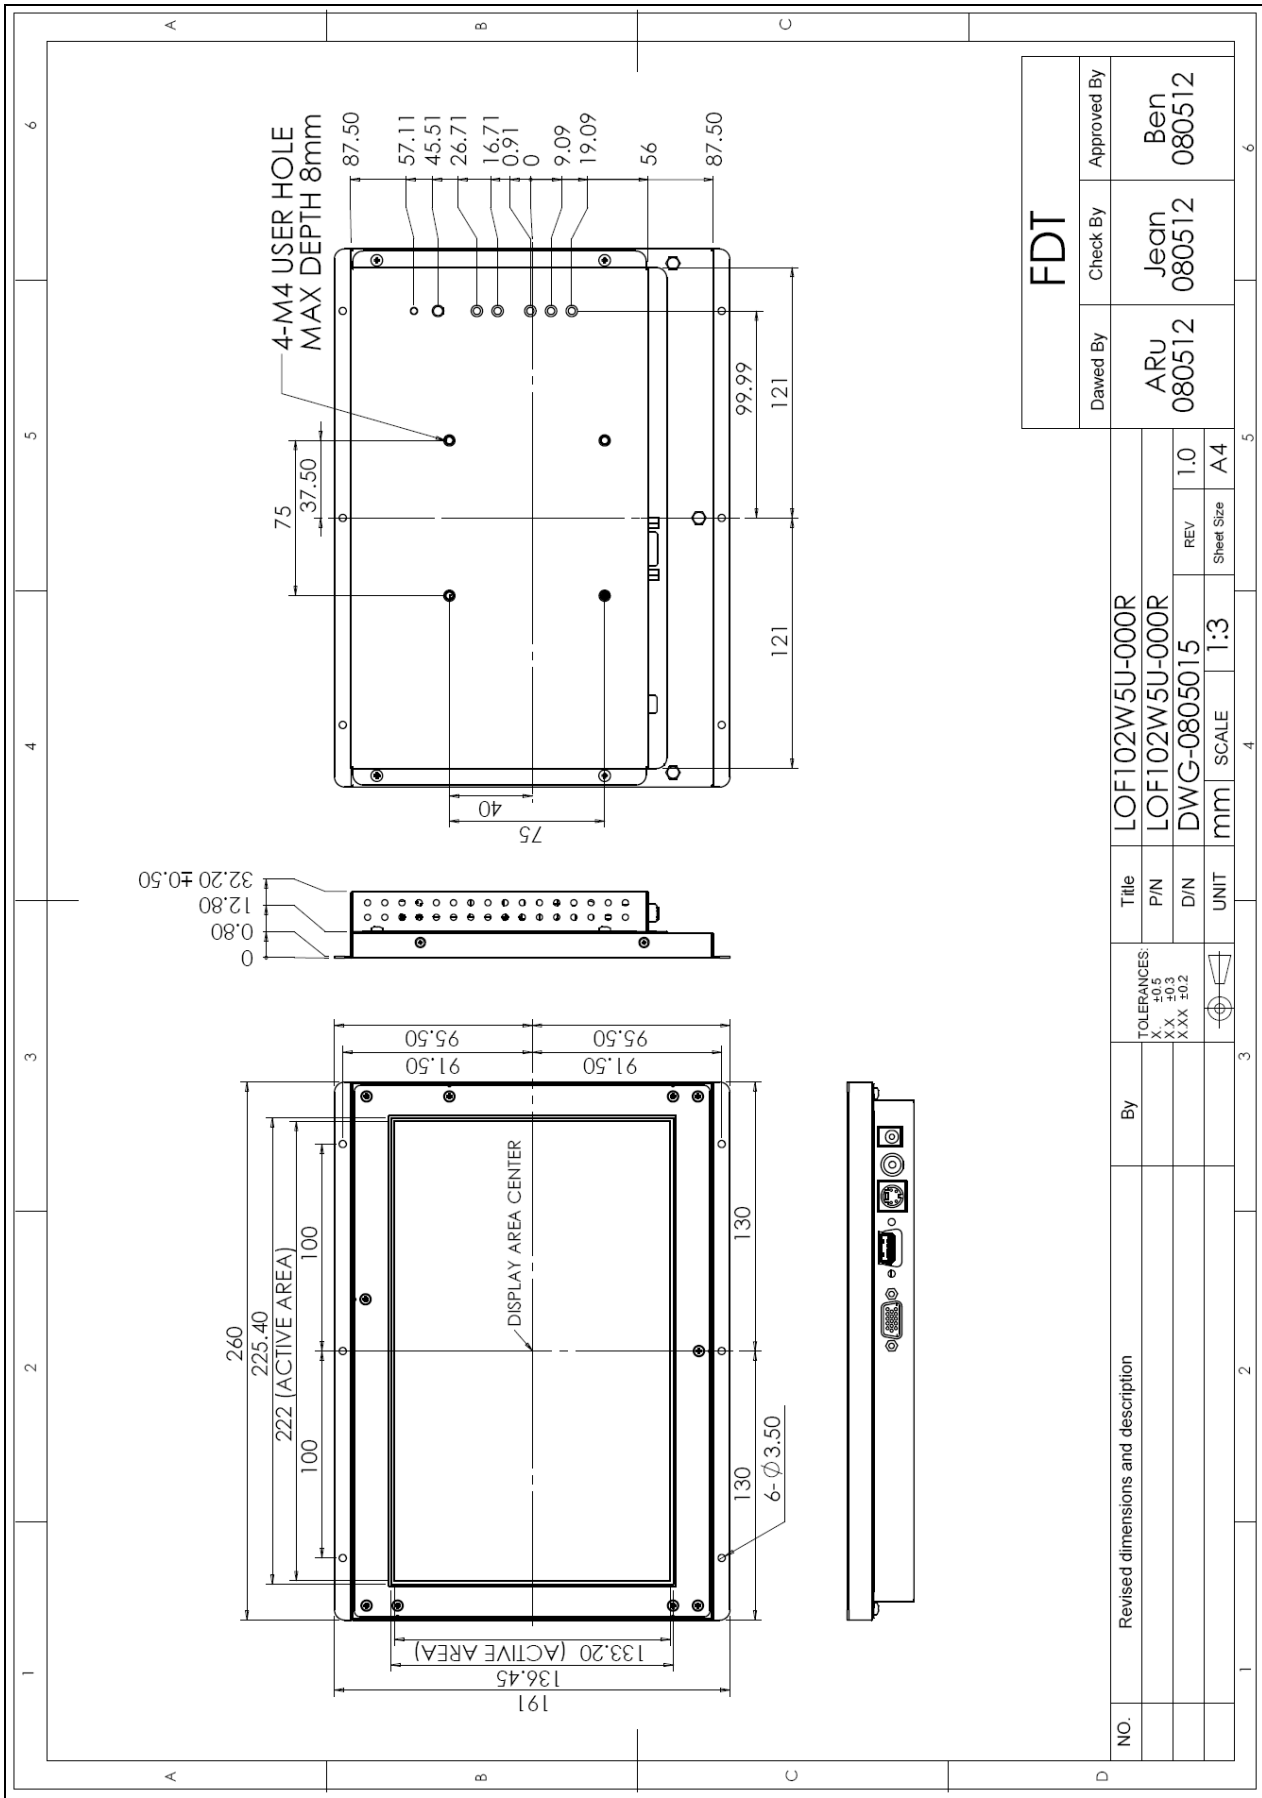


FLAT DISPLAY TECHNOLOGY

LOF102Wxx V0.0 

6.3 LOF102W5R-000R

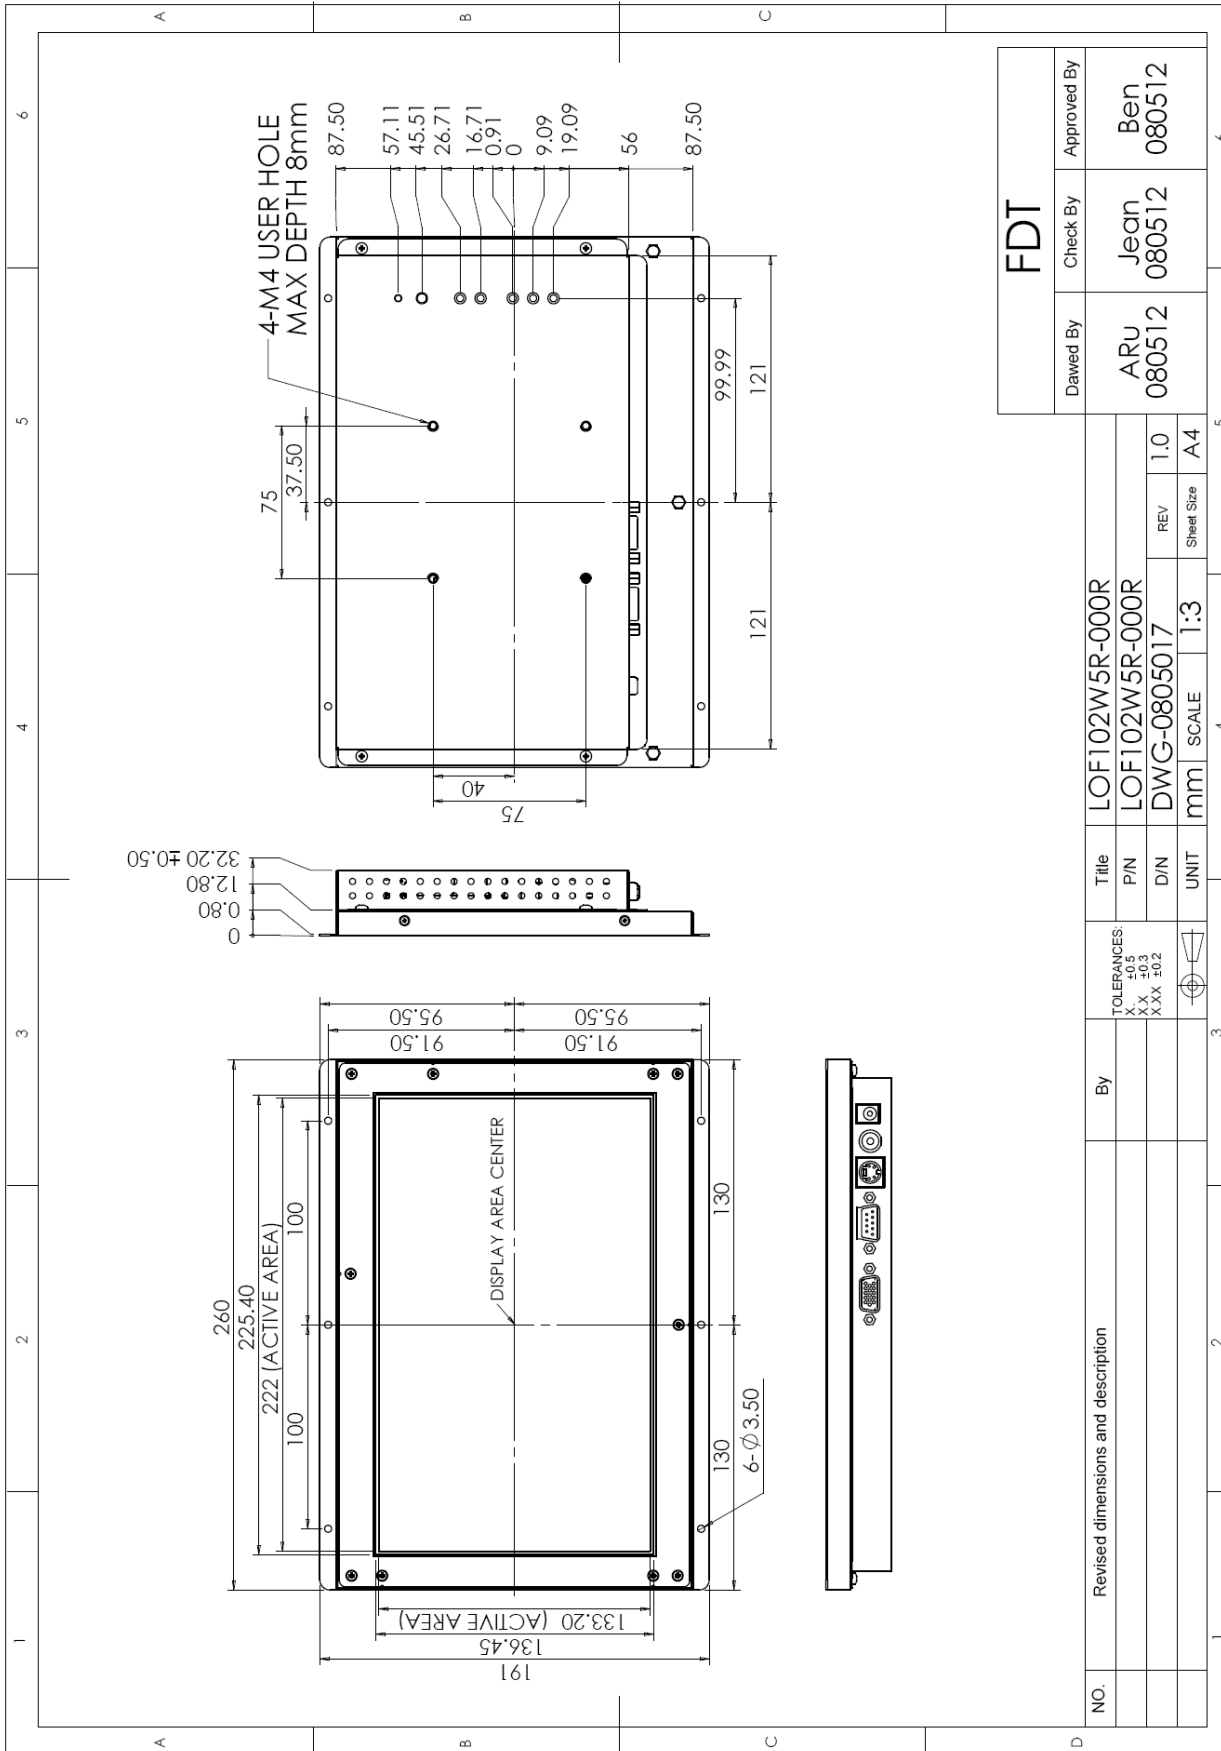


6.4 LOF102W03-010R

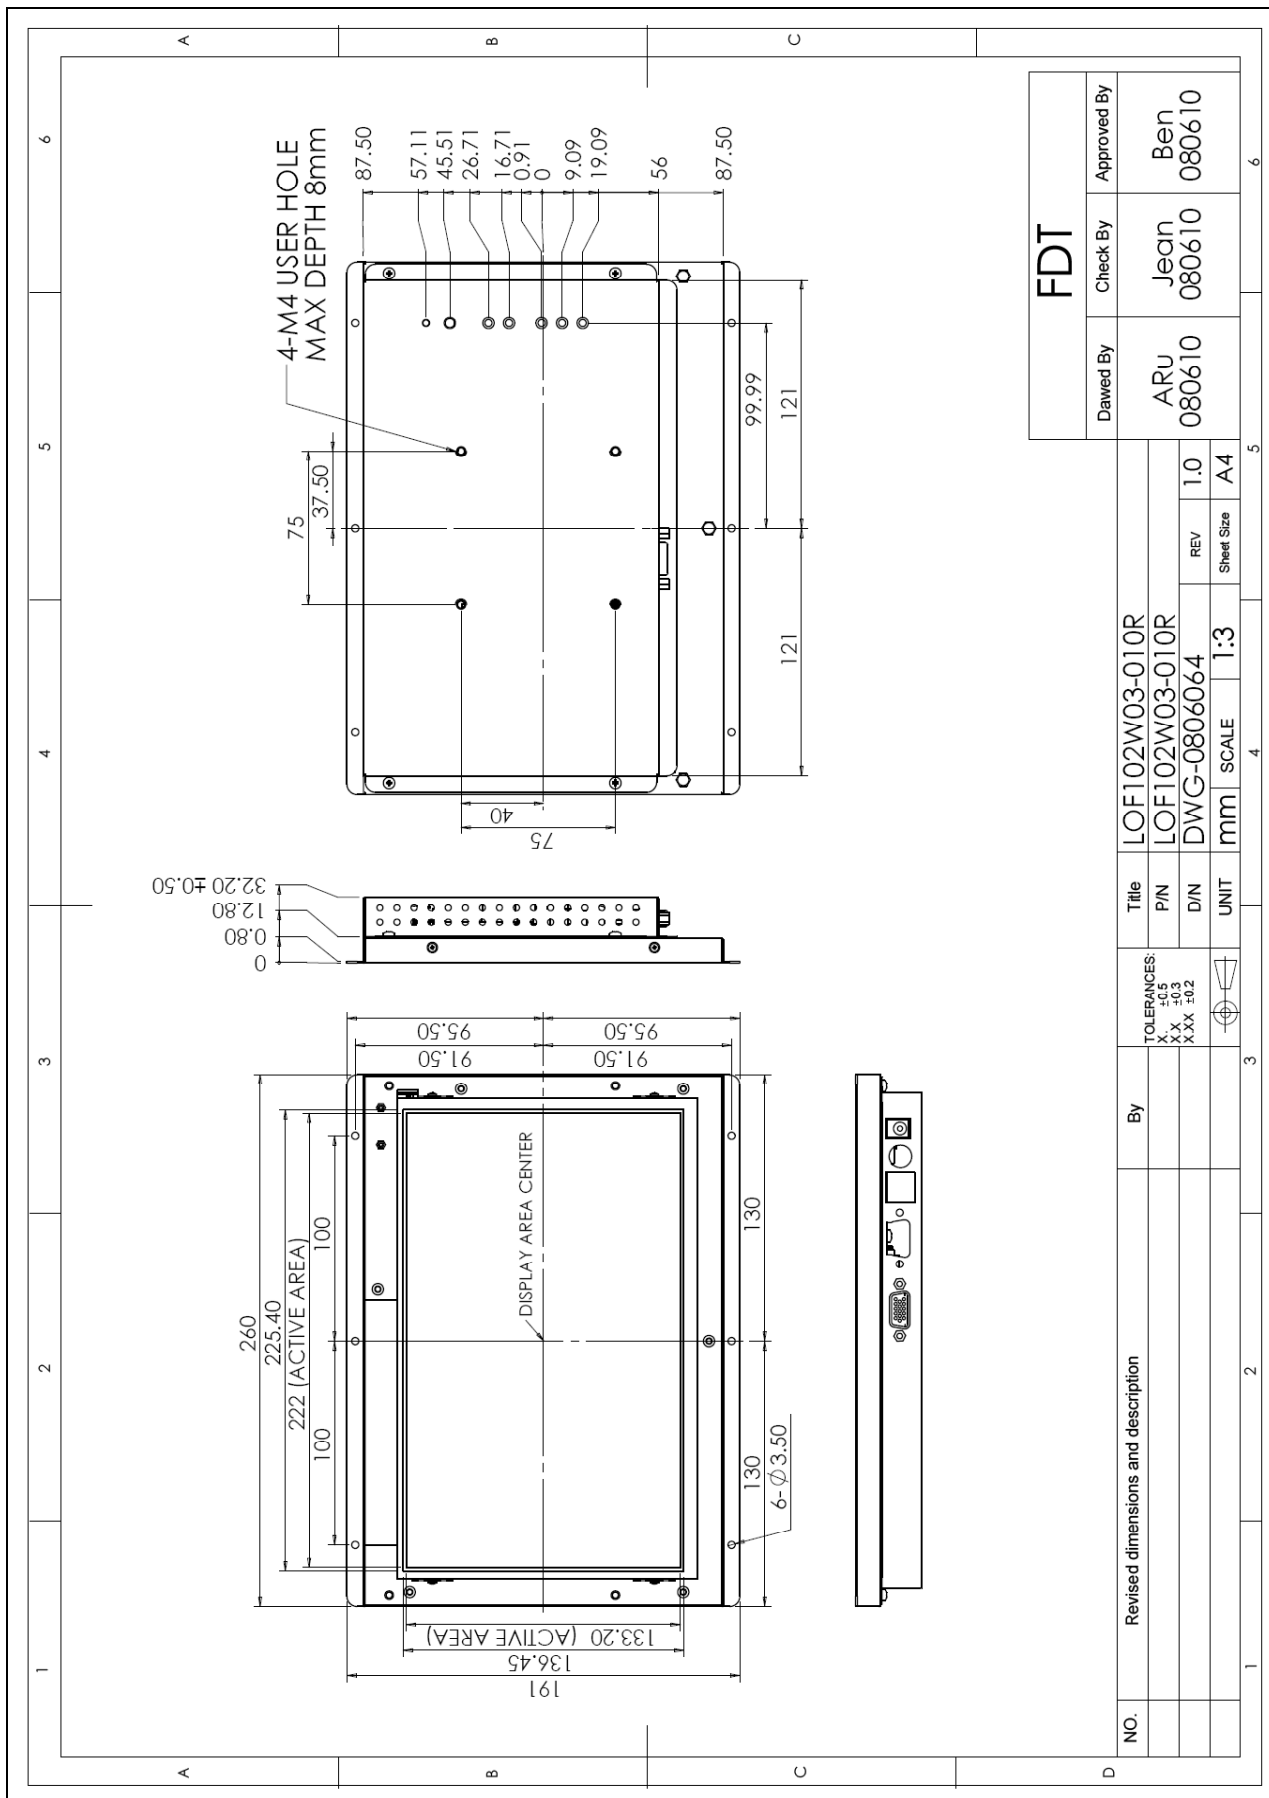


FLAT DISPLAY TECHNOLOGY

LOF102Wxx V0.0

6.5 LOF102W5U-010R

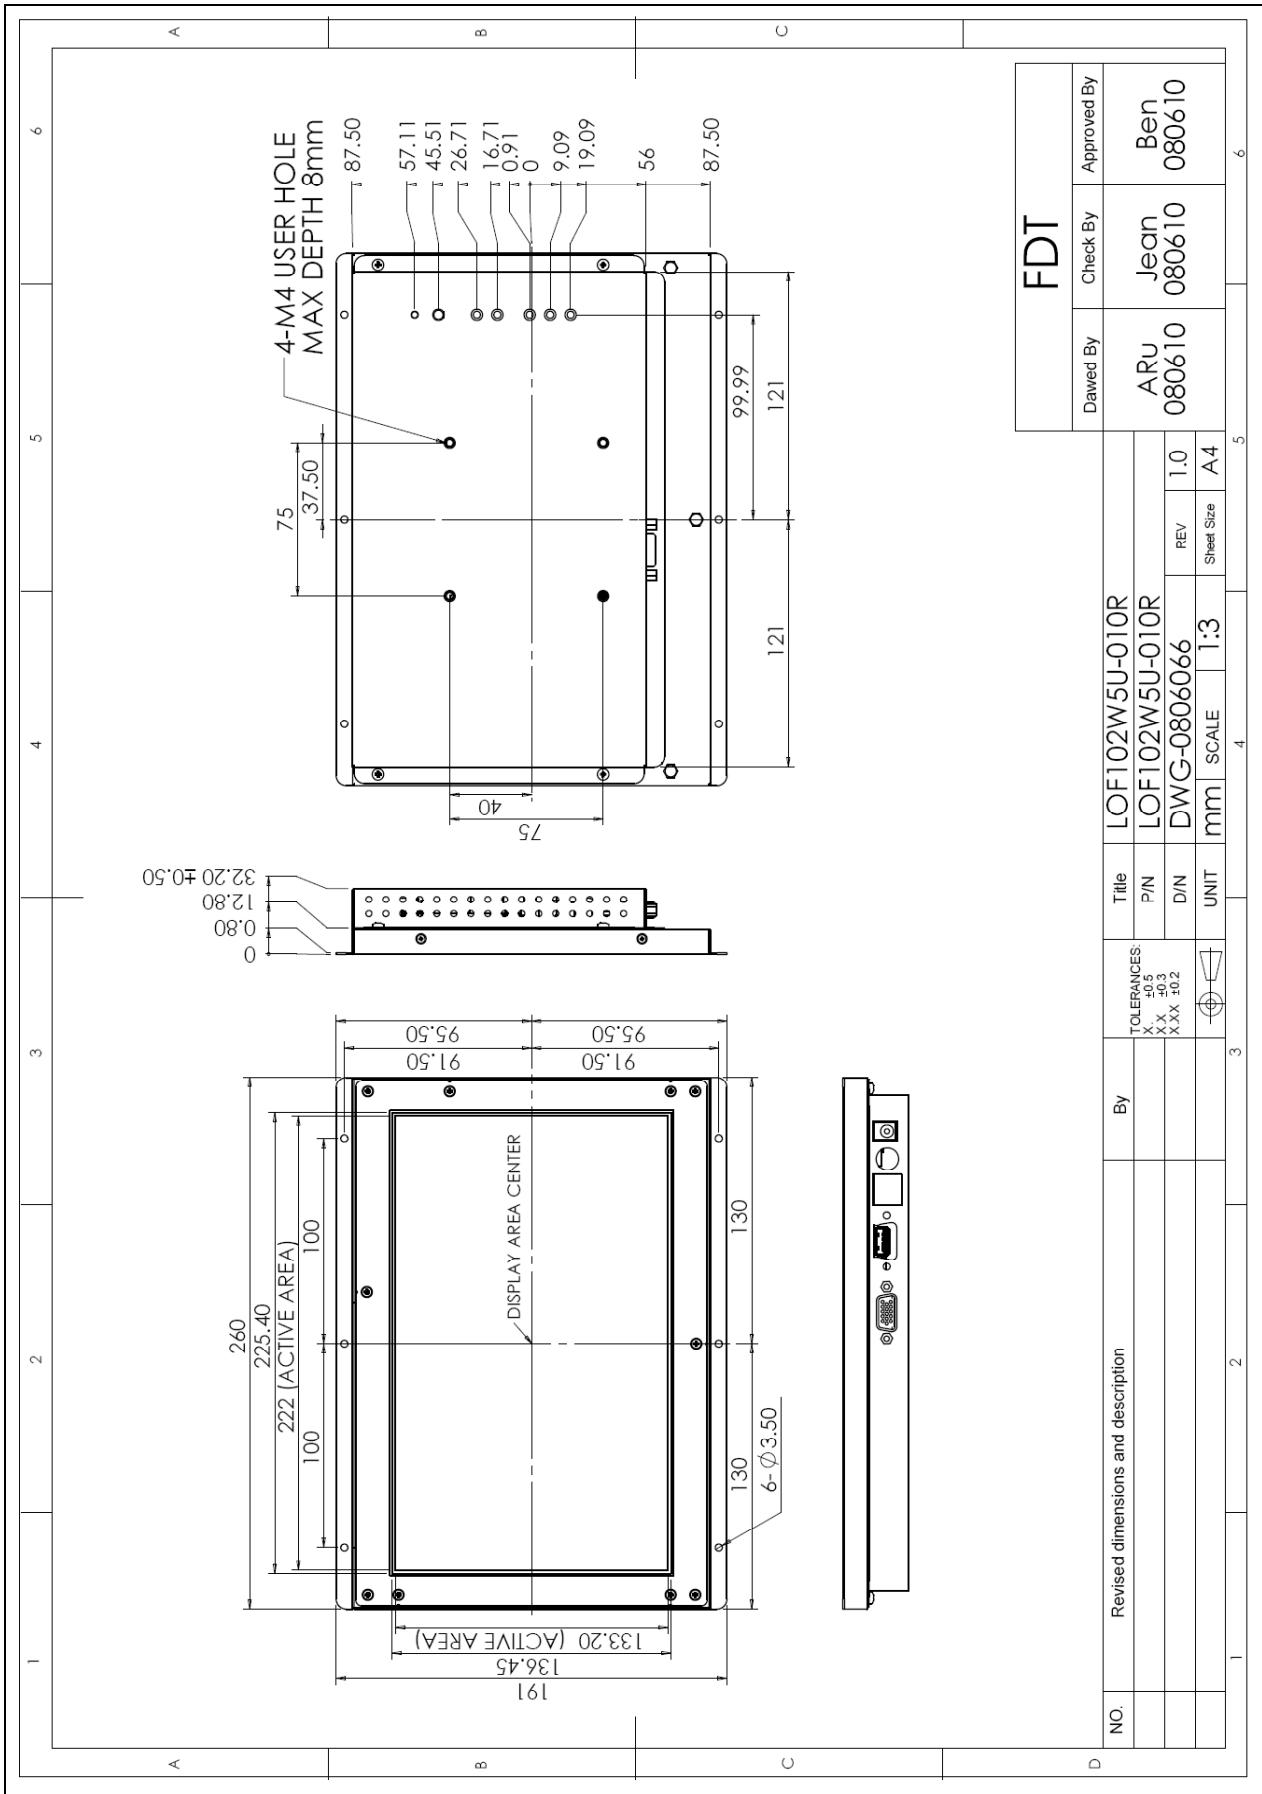

6.6 LOF102W5R-010R

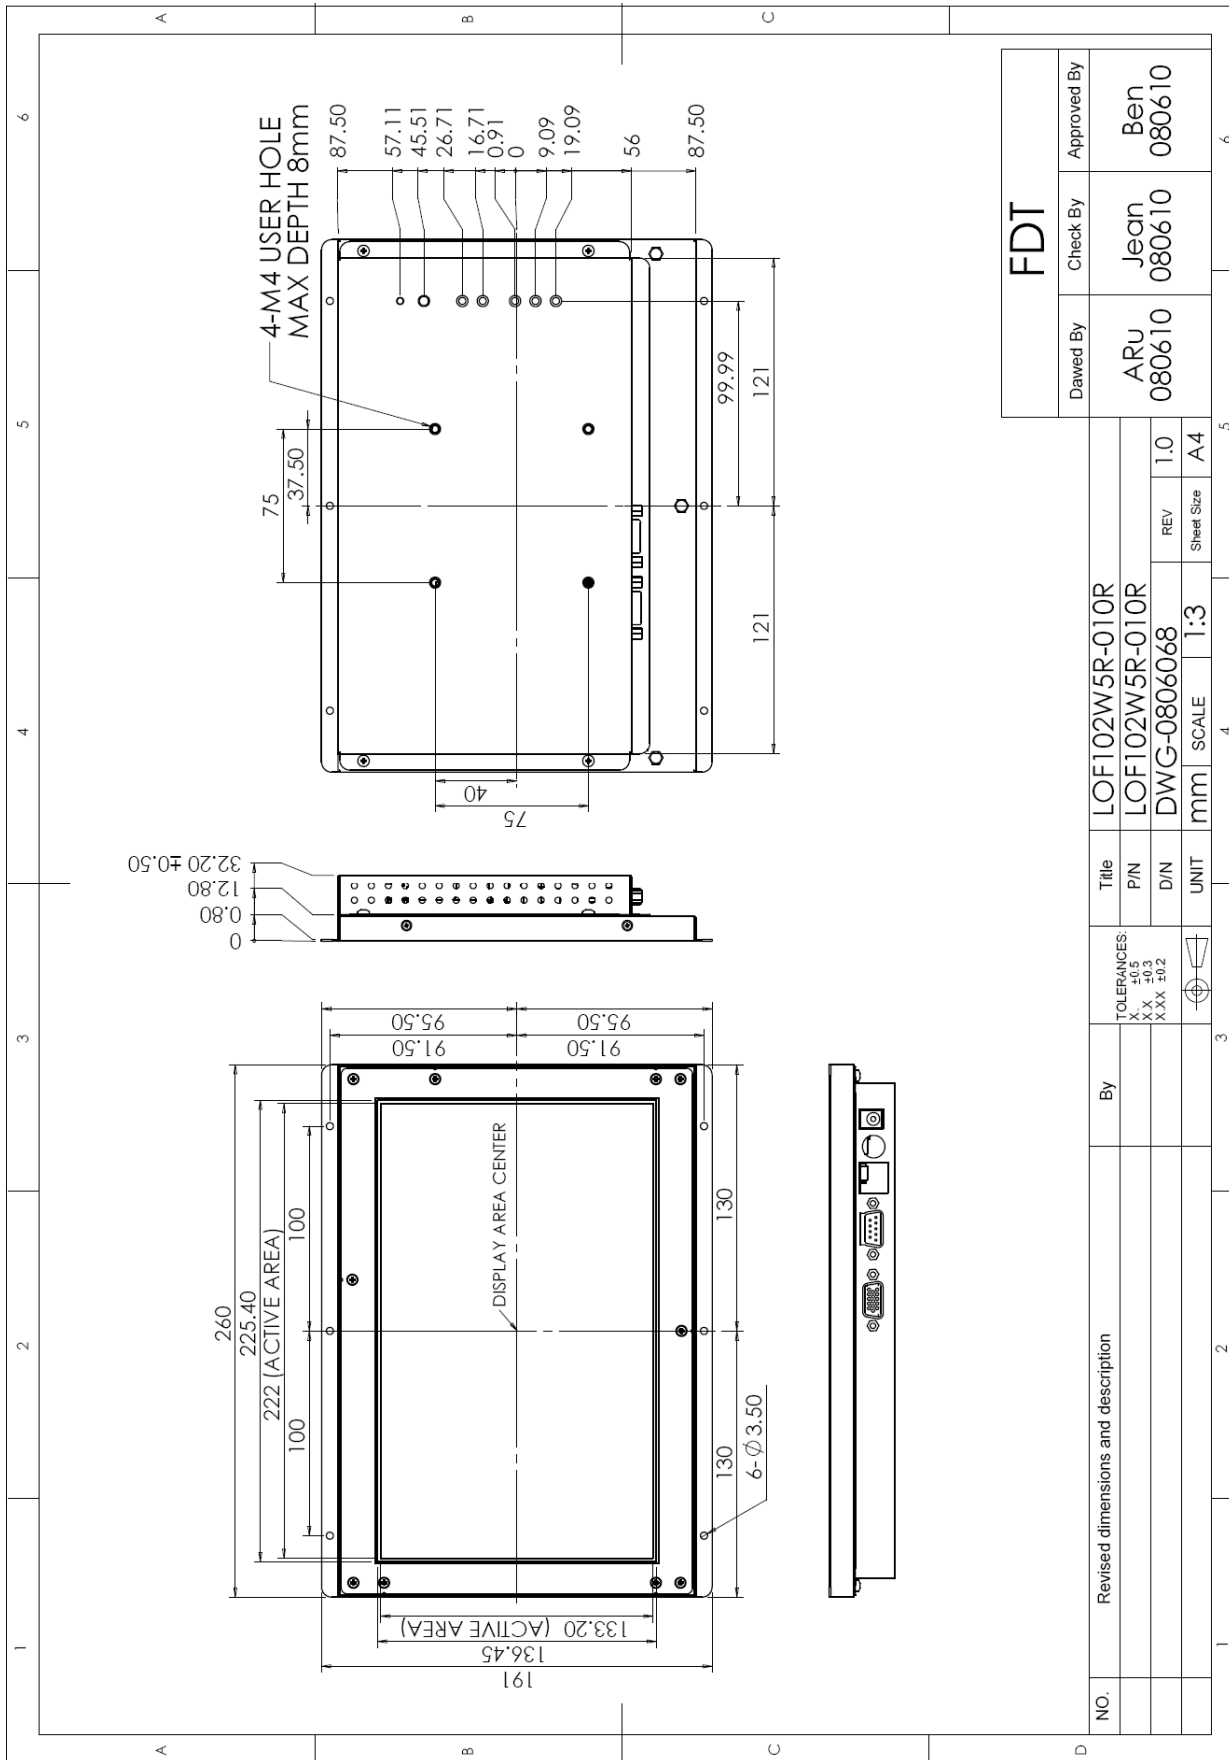

7. Packing List

Before you begin installing the Open Frame Monitor, please make sure that the following materials have been shipped:



- A. AC to DC Adapter (100-240V_{AC} 50-60Hz to +12V_{DC} @ 3A)
- B. Power Cord
- C. Video Cable (LOF102W~~xx~~-000R Only)
- D. S-Video Cable (LOF102W~~xx~~-000R Only)
- E. VGA Cable
- F. USB Cable (LOF102W5U Only)
- G. RS-232 Cable (LOF102W5R Only)
- H. Touch Screen Driver CD Disk (LOF102W5U & LOF102W5R Only) / User Manual

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

8. Installing the Monitor

8.1 Power cable connection:

Connect the power cord to the AC outlet, and connect the power to the monitor through the AC/DC adapter.

8.2 VGA signal cable connection:

Plug one end of the 15-pin signal cable to the VGA connector at the rear of the PC system and the other end to the Open Frame Monitor.


Secure the connectors with the screws on the cable connector at both ends.

8.3 Video / S-Video Cable connection:

If required, connect Video / S-Video Cable from the Open Frame Monitor to the DVD or CCD Camera.

8.4 Switch on the power:



Switch on the power switch on the rear cover of the Open Frame Monitor.

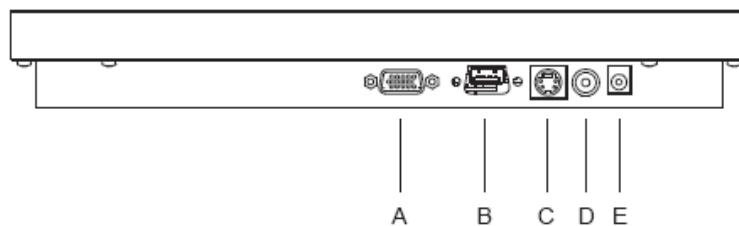

- A. VGA D-sub 15 (Female)
- B. USB / RS-232 Port (For Controller)
- C. S-Video (Y/C Video) In
- D. Video (CVBS) In
- E. DC-In (+12V_{DC} The DC jack core is positive)

9. OSD Control



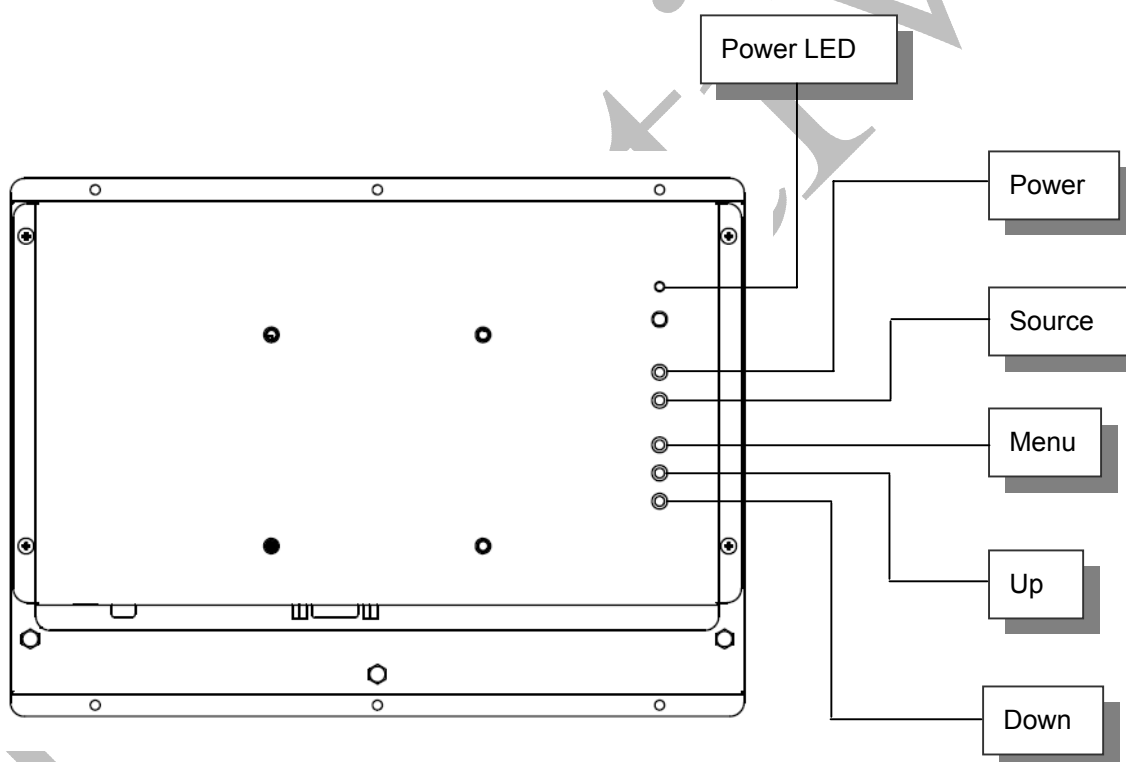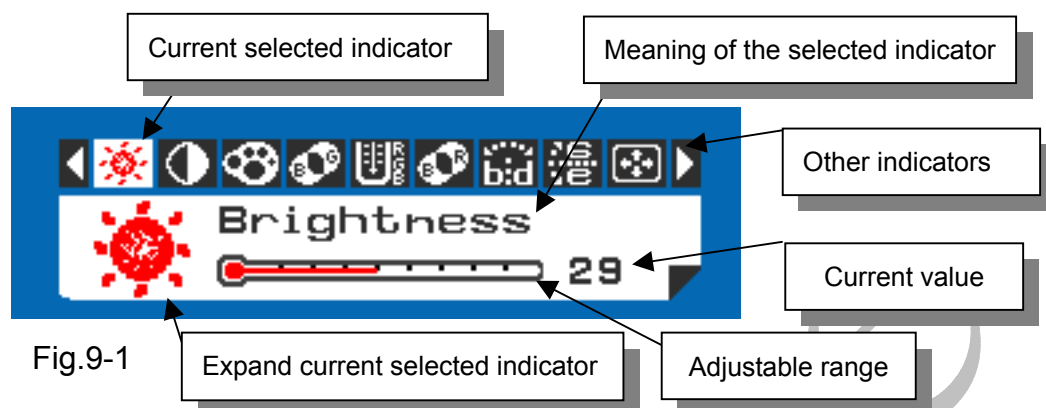












9.1 Menu Operation



Operations of key board :

1. To navigate the menu, press [MENU]. (Fig.9-1)
2. The indicator lighting up in white color is the selected adjustment item.
3. To Next Item of the menu, press [MENU] again.
4. The operations below are only available when "Menu" is started.
5. Press [UP] / [DOWN] to adjust the value of the selected item.

Overview of the menu :

Indicator	Meaning	Adjustable range	For	Remark
	Brightness	0 ~ 64	AV / S-Video / VGA	Adjust-Bar
	Contrast	0 ~ 64	AV / S-Video / VGA	Adjust-Bar
	Color	0 ~ 64	AV / S-Video	Adjust-Bar
	Tint	0 ~ 32	AV / S-Video	Adjust-Bar
	Sharpness	0 ~ 16	AV / S-Video	Adjust-Bar
	Color Tone	Normal / Warm / Cool	AV / S-Video / VGA	
	Mirror	OFF / ON	AV / S-Video / VGA	
	Flip	OFF / ON	AV / S-Video / VGA	
	H-Position	-10 ~ +10	VGA	Balance-Bar
	V-Position	-10 ~ +10	VGA	Balance-Bar
	Auto		VGA	
	Display mode	800x600/800x480	VGA	Only for SVGA/WVGA mode
	Scan	Over Scan / Under Scan	AV	
	Information		AV /VGA	Fig.9-2
	Factory Set		AV / VGA	

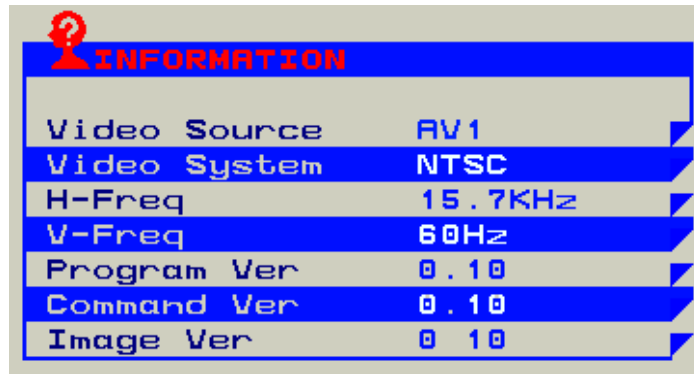


Fig.9-2

9.2 Operations

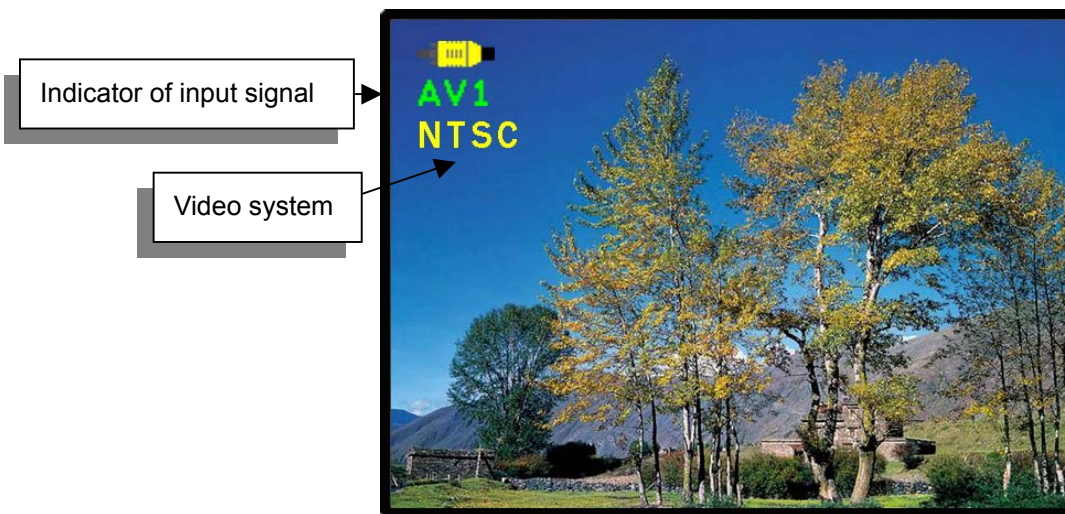





Fig.9-3

[Power] : Monitor power on / off

[Source] : Input signal switch

Overview of input signals :

Indicator	Input signal	Interface	Video system
	AV1	Composite	NTSC / PAL / SECAM
	S-Video1	Y/C	NTSC / PAL / SECAM
	VGA	Analog RGB	640x480_60 / 800x600_60 / 1024x768_60 / 1280x1024_60

10. Trouble Shooting

If experiencing trouble with the monitor, or it fails to operate correctly, please refer to the following instructions before calling for repairs.

Condition	Check Point
1. The picture does not appear	<ul style="list-style-type: none">● Check to see that all the I/O and power cables is firmly seated in the socket.● Check the Power LED is Lighting When the monitor was turned ON.● Check if the brightness control is at the appropriate position, not at the minimum.
2. The screen is not synchronized	<ul style="list-style-type: none">● Check if the I/O signal cable is firmly seated in the socket.● Check if the output level matches the input level.● Make sure the signal timings of the computer system are within the specification of the monitor.
3. The position of the screen is not in the center	<ul style="list-style-type: none">● Adjust the H-position, and V-position, or perform the auto adjustment Or Factory Set.
4. The screen is too bright (too dark).	<ul style="list-style-type: none">● Check if the brightness or contrast control is at the appropriate position, not at the Maximum (Minimum).
5. The Screen is shaking or waving	<ul style="list-style-type: none">● Press the Auto adjustment control to adjust. Moving all objects which emit a magnetic field such as motor or transformer, away from the monitor. Check if the specific voltage is applied.● Check if the signal timing of the computer system is within the specification of monitor.

If you are unable to correct the fault by using this chart, stop using your monitor and contact us.